

ATLAS TRANSFER CASES CABLE SHIFTER units built after 5/1/12

KIT CONSISTS OF:

No.	Qty	Part No.	Description
1	1	302051	BASE- TWIN STICK MOUNT
2	1	302060	BOOT- TWIN STICK
3	1	302061	ATLAS SHIFT KNOB STICKER
4	1	302063	BOOT RING- ATLAS TWIN STICK
5	1	302080	STUD BOLT 1/2"-13 X 7 (XJ)
6	2	302083	TWIN STICK KNOB
7	1	302084	STICKER TWIN STICK KNOB (H-N-L)
8	1	303301	HOUSING- TWIN STICK SHIFTER
9	1	303303	RETAINER- SHIFTER BODY BARREL
10	2	303304	LEVER- TWIN STICK CABLE SHIFTER
11	2	303305	BARREL- TWIN STICK CABLE
12	1	303307	ATLAS CABLE BRACKET
13	2	303309-1	CABLE-ATLAS SHIFTER 48" LENGTH 1" TRAVEL (green, purple or blue cables)
14	1	303310A	BOLT- SHOULDER 3/8" DIA. 5/16"TH x 3"
15	4	303312	BUSHING- IGUS 3/8"
16	2	303313	HEIM JOINT- FEMALE 1/4"-28
17	2	303316	NUT- ATLAS CABLE RETAINER OUTER
18	2	303317	NUT- CABLE SHIFTER- JAM 1/4-28
19	1	303119	SHIFTER KIT BOLT PACK
20	1	303308-B	TUBE- ATLAS SHIFTER EXTENSION 4.6"
21	2	42R726	HEAT SHIELD- FIREPROOF SLEEVE 24"

(FOR CABLES AROUND EXHAUST & OR TRANSMISSION COMPONENTS)

The shifter body, handles, and pivot bolt were updated 11-10-11. These items retained the same part numbers, but will not fit as replacement parts for older shifter units. If a replacement handle or body is needed then you will need the new style components. The old pivot bolt can be obtained from McMaster Carr.

SPECIAL NOTE: The components packaged in this kit have been assembled and machined for specific type of conversions. Modifications to any of the components will void any possible warranty or return privileges. If you do not fully understand modifications or changes that will be required to complete your conversion, we strongly recommend that you contact our sales department for more information. This instruction sheet is only to be used for the assembly of Advance Adapter components. We recommend that a service manual pertaining to your vehicle be obtained for specific torque values, wiring diagrams and other related equipment. These manuals are normally available at automotive dealerships and parts stores.

ATLAS TRANSFER CASES CABLE SHIFTER units built after 5/1/12

We can offer a set of aluminum knobs which are labeled either way.



P/N 303152AA \$42.95 set
reverse pattern



P/N 303150AA \$42.95 each
standard pattern

This shifter will not fit the Allison transmission due to cable interference with the stock adapter housing.

NOTE ON THIS KIT: This kit is a universal-type cable shifter assembly. Mounting the shifter is left to the installer. The shifter can be mounted flush with the floor so that the cables exit underneath the floor, and the shift boot flange is bolted directly to the floor. Otherwise, the shift cables will need to be routed through the floor and the shifter bolted wherever you desire.

NOTE ON SHIFTING: The Atlas Transfer case is a synchronized unit. The transfer case shifts best when the shafts are spinning. Note that when the transfer case is shifted when not in motion, the teeth may or may not be aligned. If the teeth are aligned, then the unit will slip into gear easily. If the unit does not slip into gear easily, then no amount of pulling on the handle will cause the unit to shift. The transfer case must be spun slightly and then it will shift.

***Note:** The first cable shifters used an shift rail adapter on the shift rail for coupling the cables to the Atlas. The shift rails were changed 7-1-07. This new style of rail is drilled and tapped to directly accept the threaded cable end and eliminate the shift rail adapter. We switched back to the adapters fittings 8-16-10 for ease of installation of the cable to the Atlas. Some shift rails still have the thread on the end of the shift rail. 3/15/12 newest shift rail to work with the new cable connection parts has a drilled clearance hole in shift rail. (see photo next page)

SPECIAL NOTE: The components packaged in this kit have been assembled and machined for specific type of conversions. Modifications to any of the components will void any possible warranty or return privileges. If you do not fully understand modifications or changes that will be required to complete your conversion, we strongly recommend that you contact our sales department for more information. This instruction sheet is only to be used for the assembly of Advance Adapter components. We recommend that a service manual pertaining to your vehicle be obtained for specific torque values, wiring diagrams and other related equipment. These manuals are normally available at automotive dealerships and parts stores.

ATLAS TRANSFER CASES CABLE SHIFTER units built after 5/1/12

ASSEMBLY

Transfer Case End: (see photo next page)

Bolt the twin stick base to the transfer case with the 3/8"-16 socket head cap screws.

Thread the 1/2"-13 all thread completely into the twin stick base. Install the 1/2"-13 jam nut. Tighten the jam nut against the twin stick base.

Slide the extension tube and the extension tube bracket over the all thread and fasten with the 1/2"-13 serrated lock nut.

Remove one of the 5/8" jam nuts and slide the cable through the extension tube bracket. Loosely re-install the 5/8" jam nut to hold the cable in place. Remove the 1/4" nut from the cable end and discard. Slip the 303316 outer nut cap over the cable end and then thread the 303317 cable nut on to the 1/4-28 cable end. The cable nut must be set at a distance that when the cable end is inserted into the Atlas shift rail, the cable end bottoms out in the shift rail. The nut is then adjusted to the front face of the shift rail. Once the cable nut is adjusted correctly, slip the nut cap over the cable nut and onto the Atlas shift rail. Tighten the cap nut to retain the cable end to the Atlas shift rail. Use caution when turning the cap nut, making sure it does not turn the inner cable nut. Once the assembly is fastened together you should only see about 1/4" of the 1/4-28 threads coming out of the nut cap. Repeat this step on the second cable.


Once both cables are connected, the cable outer housing needs to be set to the cable mount bracket. Shift the transfer case into low range for this adjustment. The easiest way is to use a long punch and a dead blow hammer, set the punch (flat tip) on the nut cap and tap the punch lightly with the hammer. It should pop into the low gear ratio. Turning the yoke can confirm that you're in low gear. Once both shift rails are in low gear you can adjust the outer cable housing.

Loosen the large jam nuts on the cable. Apply some force on the outer housing of the cable pulling away from the transfer case. The cable is a 1" travel and the Atlas shift rail is .960". With the Atlas in low range and the outer housing of the cable extended entirely the other direction, you can now set the jam nuts to the extension tube bracket knowing that the travel of both components is correct. Repeat this on the second cable.


Shift the Atlas back into neutral so when you get to the shifter box assembly and handle orientation, it is easy to see the correct alignment.



New shift rails with clearance holes drilled

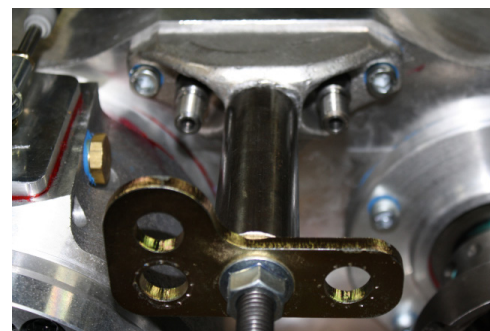

support tube and bracket installed

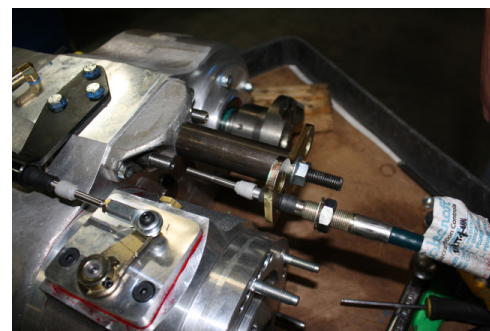

Cable being installed through the bracket

SPECIAL NOTE: The components packaged in this kit have been assembled and machined for specific type of conversions. Modifications to any of the components will void any possible warranty or return privileges. If you do not fully understand modifications or changes that will be required to complete your conversion, we strongly recommend that you contact our sales department for more information. This instruction sheet is only to be used for the assembly of Advance Adapter components. We recommend that a service manual pertaining to your vehicle be obtained for specific torque values, wiring diagrams and other related equipment. These manuals are normally available at automotive dealerships and parts stores.

ATLAS TRANSFER CASES CABLE SHIFTER units built after 5/1/12



Remove the 1/4" jam nut and install the nut cap over the cable.




Install the cable nut on the cable threads.




The cable should bottom out in the shift rail and the cable nut should be flush against the face of the shift rail.




Once the cable nut has been adjusted, slide the nut cap over the shift rail and tighten to retain the cable to the shift rail. Shift the transfer case into low range (shift rail pushed inward) to set the outer cable housing.

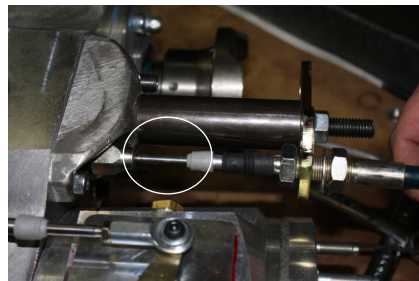

The outer cable housing now needs to be set. Pull the outer housing away from the transfer case. The inner cable should be fully extended.

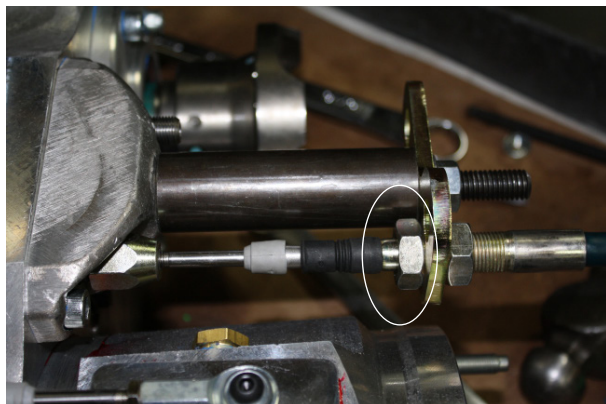

With the cable fully extended in this direction you will now need to secure the 5/8" jam nuts to the bracket of the transfer case. Since the cable has a bit more travel than the Atlas needs, we recommend to thread on (circled) nut first to the bracket and then give it one additional full turn which will pull the outer cable housing back slightly. Then snug the front nut. Once both nuts are snug to the bracket, tighten them with a wrench. Before moving up to the shifter box, shift transfer case back to neutral.

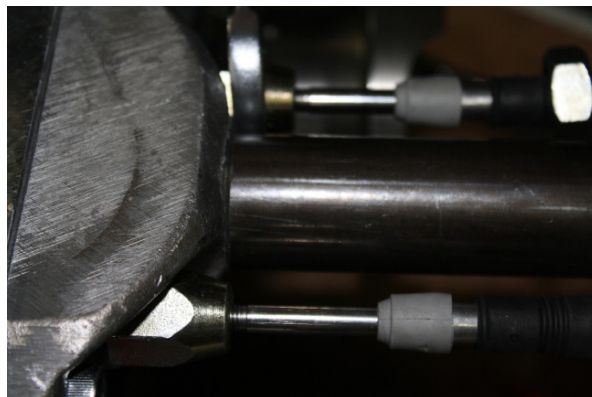

SPECIAL NOTE: The components packaged in this kit have been assembled and machined for specific type of conversions. Modifications to any of the components will void any possible warranty or return privileges. If you do not fully understand modifications or changes that will be required to complete your conversion, we strongly recommend that you contact our sales department for more information. This instruction sheet is only to be used for the assembly of Advance Adapter components. We recommend that a service manual pertaining to your vehicle be obtained for specific torque values, wiring diagrams and other related equipment. These manuals are normally available at automotive dealerships and parts stores.

ATLAS TRANSFER CASES CABLE SHIFTER units built after 5/1/12

Shifter End:

1. Remove 1 of the 5/8" jam nuts and the lock washer from each cable and discard.
2. Slide the Barrel Retainer plate over both shifter cables, then thread both cable barrels onto the shift cables.
3. Now thread the heim joints onto the shift cables inner rod and tighten the jam nuts. (This should look like the photos to the right.)
4. Using a mallet, hammer the pivot bushings into the shifter handles. Start the bushing into the handle, hold the handle with the bushing side down on the table, hit the top side of the handle with the dead blow hammer to install the bushing. Repeat for the remaining bushings.
5. Slide the cables into the back of the shifter body.
6. Orient the shifter handles so they bend away from each other and slide the handles into the top of the shifter body.
7. Insert the pivot shoulder bolt through the shifter body and the shifter handles. Fasten with the 1/4" flat washer and the 5/16" locknut.
8. Slide the heim joint to meet the tapped hole in the shift handle and insert the bolt from the bottom of the shifter box to secure the handles to the cables.
9. Slide the cable barrel retainer plate up the shifter body and fasten it with the 1/4"-20 button head cap screws (Note: Do not fully tighten these cap screws).



10. With the transfer case in neutral and the shifter box assembled, you will need to adjust the handles in the shifter box. Make sure the 5/8" jam nut is not tight against the cable barrel. By turning the cable barrel with a set of pliers it will move the outer cable housing inward or outward and thus move the handle forward or backwards in the shifter box. Since the cables are set correctly down at the transfer case and the transfer case is now in neutral. The goal is, the handles should be adjusted to create a 90 degree angle with the orientation of the handles to the top of the shifter box. When the shifter is adjusted properly,

tighten the jam nuts and the cable barrel retainer plate screws (see photo next page).


SPECIAL NOTE: The components packaged in this kit have been assembled and machined for specific type of conversions. Modifications to any of the components will void any possible warranty or return privileges. If you do not fully understand modifications or changes that will be required to complete your conversion, we strongly recommend that you contact our sales department for more information. This instruction sheet is only to be used for the assembly of Advance Adapter components. We recommend that a service manual pertaining to your vehicle be obtained for specific torque values, wiring diagrams and other related equipment. These manuals are normally available at automotive dealerships and parts stores.

ATLAS TRANSFER CASES CABLE SHIFTER units built after 5/1/12

(This photo is not
the actual shifter
supplied in this kit)



11. Slide the shift boot over the handles and stretch it over the shifter body. Depending on how the shifter is mounted, you may want to bolt the shift boot through the shifter body. If the shifter will be flush mounted in the floor, you may bolt through the shift boot, shifter body and the floor with one set of bolts.
12. Once the boot is in place, thread the 1/2"-13 jam nuts, and then thread the shift knobs onto the shifter handles.

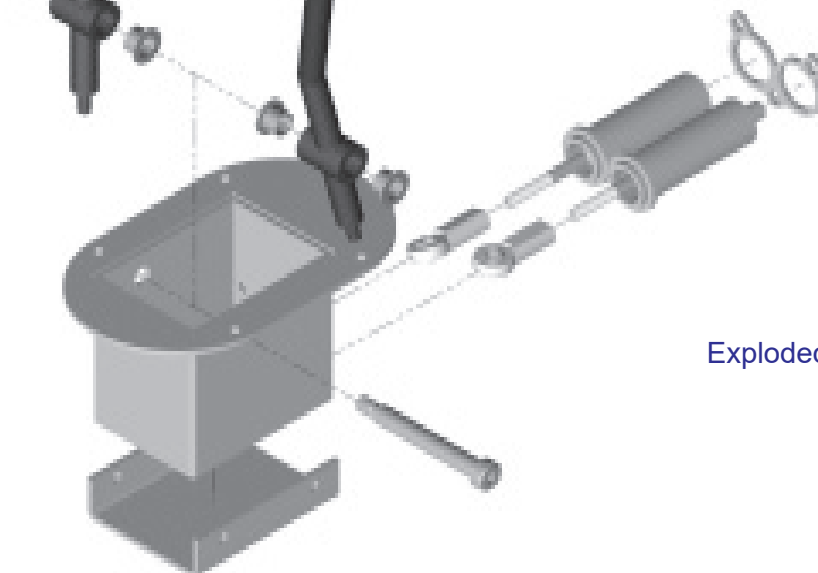

Exploded View

SPECIAL NOTE: The components packaged in this kit have been assembled and machined for specific type of conversions. Modifications to any of the components will void any possible warranty or return privileges. If you do not fully understand modifications or changes that will be required to complete your conversion, we strongly recommend that you contact our sales department for more information. This instruction sheet is only to be used for the assembly of Advance Adapter components. We recommend that a service manual pertaining to your vehicle be obtained for specific torque values, wiring diagrams and other related equipment. These manuals are normally available at automotive dealerships and parts stores.